




Zip HydroTap[®]

Filtered chilled water

C Series

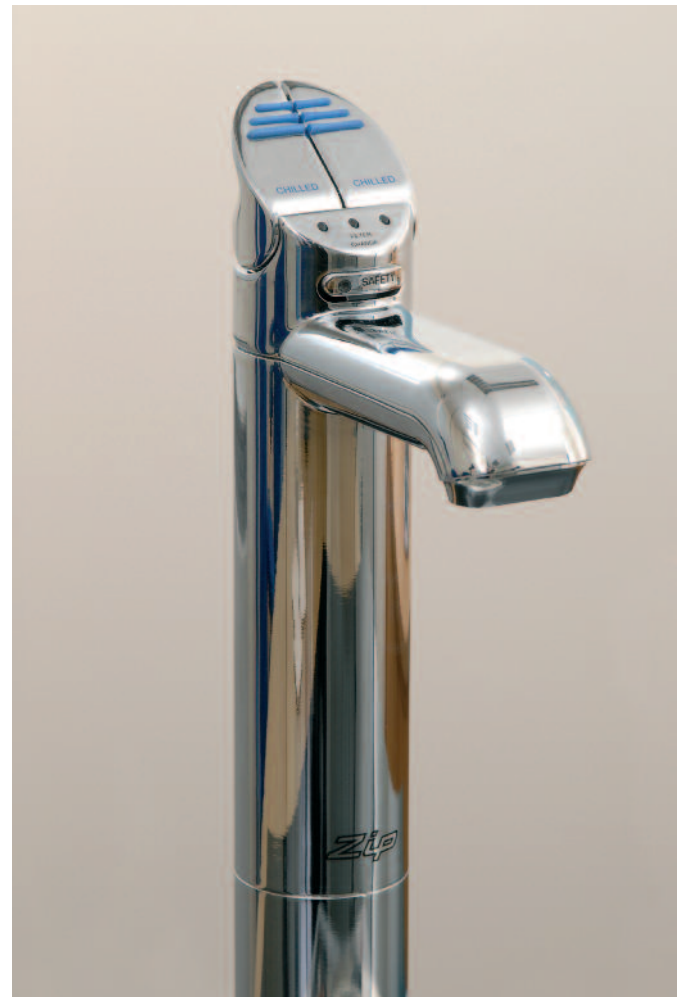

Delivery rate

Up to 18 glasses at a time

Recovery rate

Up to 125 glasses/hour*

*Dependant upon incoming water temperature and ambient air temperature

Features

Healthy, clean, chilled drinking water instantly

Everything but the tap is hidden under the work top

No more bottled water to buy or store

Can be installed on virtually any work top with the Tap Font (optional extra)

01.01.10



		Delivery glasses at a time	Recovery glasses/hour	Energy rating (kW @ 230V)	Dimensions (mm) W x D x H
Chilled only, filtered					
Zip HydroTap®	C125	18	125	0.3	306 x 457 x 334

*Standard glass size: 200ml

- Under-sink instant chilled water
- Chilled water instantly through an electronic lever
- Option of installing on a work top or sink
- Components other than the tap in a single case with quick access to the water filter
- Integral pressure lock isolation system to protect against pressure surges
- Moisture sensor to detect water leakage.

Rating

0.3 kW @ 230V AC.

Chiller system

Fan-cooled condenser type.

Refrigerant

R134A.

Tap head

Chrome plated electronic tap with levers and LED indicators.

Approvals

WRAS Approved and CE Endorsed.

Warranty

One-year on site parts and labour. For full details of the Zip Warranty Scheme visit: www.zipheaters.co.uk/warranty.

Location

The tap should be positioned either on a suitable sink or on a Zip Tap Font (optional).

The chiller unit should be located as closely as possible to directly beneath the tap and not more than 1 metre away.

The chiller unit must be installed with clearances of 50mm left and right and 65mm at rear.

Plumbing

The water supply must be potable (drinkable).

If static pressure exceeds 7 bar, a pressure reducing valve must be fitted.

An isolating valve should be installed between the water supply and the under-counter unit.


Electrical

To be wired to a double pole fused spur, minimum break rating of 13 amps.

Installation must comply with current IEE regulations.

Technical Support

Contact Zip on 0800 077 8302.

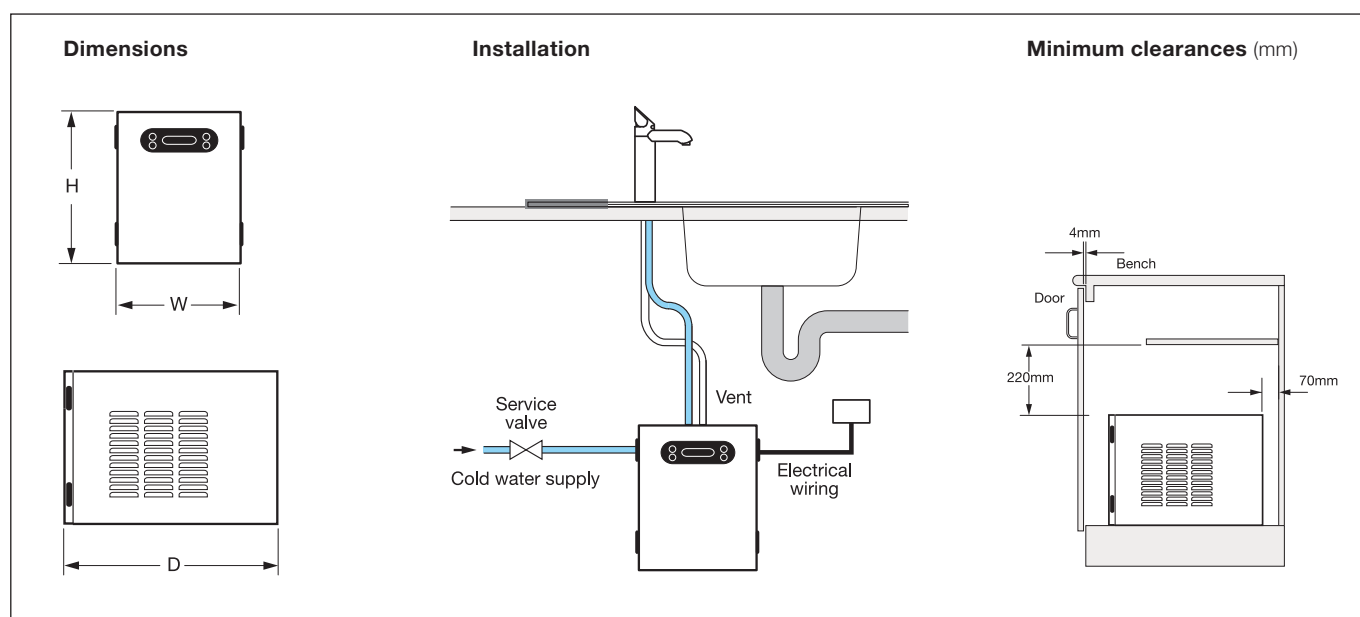

01.01.10