



Zip Tudor™

Over-sink or under-sink water heaters

Open outlet to single point
5.0 litre, 10.0 litre



5 litre model

10 litre model



UB 1



UB 6



UB 7



TS 1

Optional accessories

- UB1
Monobloc mixer
- UB6
Single lever basin tap
- UB7
Single lever sink tap
- TS1
Telescopic 300-600 mm spout

Features

- Adjustable temperature control
- Choice of 5 or 10 litres capacity
- Over-sink models supplied complete with spout and valve
- Under-sink models for connection to open-outlet tapware only
- Mains cable connected
- CFC - free insulation
- Impact resistant, easy clean, white plastic casing
- Manually re-settable cutout
- Neon power indicator light

01.01.10



				Dimensions (mm)			Thermal Loss kWh/day	Weight (kg)	
				A	B	C		Empty	Full
Zip Tudor™	Over-basin	5.0 litre	P4/52	390	255	215	0.32	3.5	8.5
Zip Tudor™	Under-basin	5.0 litre	P4/52UB	390	255	215	0.32	3.5	8.5
Zip Tudor™	Over-basin	10.0 litre	P4/102	455	310	265	0.40	4.0	14.0
Zip Tudor™	Under-basin	10.0 litre	P4/102UB	455	310	265	0.40	4.0	14.0

- Over-sink or under-sink water heaters
- Open outlet to single point
- Swivel arm open outlet spout and on/off valve (over-sink models)
- Plumbing connections at top of heater (under-sink models)
- Full external temperature control ranging from 35°C to 80°C
- Frost protection setting to protect the heater when not in use
- Low watts density spiral heating element for rapid recovery and long life
- Manually re-settable over-temperature safety cut-out
- External neon light indicator to indicate when element is 'ON'
- Mains cable connected

Capacity
5 litres, 10 litres

Rating
2.0 kW

Heating element
Embedded rod type

Thermostat
Capillary type, adjustable 35°C to 80°C

Water tank
Approved polypropylene tested to 40 psi

Case
Impact resistant plastic.

Insulation
Contoured polyurethane, CFC free.

Safety feature
Manually re-settable over-temperature safety cut-out.

Approvals
WRAS approved and CE endorsed.

Simple to install
Supplies hot water to a single outlet.

Connects directly to the cold water supply.
No need for expansion vessel or relief valve.

Simple to operate
Temperature controlled water whenever you want it.
Externally adjustable temperature control.

Neon light indicates when heating element is 'ON'.

Special safety features
Open-outlet non-pressurised system.

Frost protection setting protects heater when not in use.

Manually re-settable over-temperature safety cut-out.

Warranty
One-year on site parts and labour. For full details of the Zip Warranty Scheme visit: www.zipheaters.co.uk/warranty.

Installation

Location
All models should be wall mounted. Screws and plugs suiting most walls provided.

Plumbing
Can be connected to a rising main or to a cistern with a minimum working head of 5 metres.

All water connections are via 15mm compression fittings.
Over-sink models are supplied with a 300mm open outlet spout and water control valve.


Under-sink models must be installed only with a Zip-approved open-outlet tap.

Over-sink and under-sink models are NOT interchangeable.

Electrical
To be wired to a double pole fused spur, minimum break rating of 13 amps.

Installation must comply with current IEE regulations.

Caution
Variable temperature water heaters should be set only in strict compliance with regulations governing the temperature of stored and dispensed hot water.

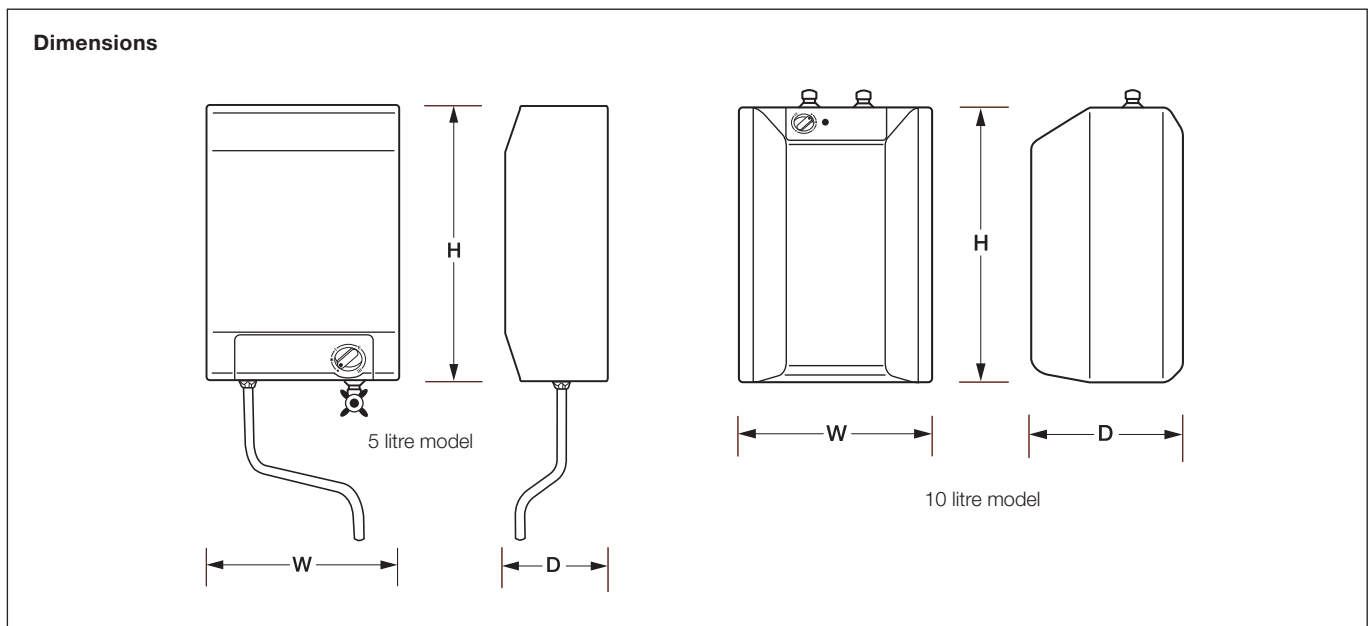

01.01.10