



Zip XL™

Water heaters

Electronic temperature control
25.0 litre, 50.0 litre, 75.0 litre



Accurate control

Advanced electronic technology provides reliable temperature control
Ideal heater wherever accurate control of water temperature is essential
Stored water temperature can be set at any point between 25°C to 80°C
Cold water intake is regulated so sensor temperature remains within 1°C of selected temperature
Restores water to set temperature after any interruption to the power supply

Features

Supplies single or multiple outlets
Electronically controlled hot water
Adjustable temperature control
Designed to control stored water temperature within 1°C of selected temperature

01.01.10



		kW @ 230V		Dimensions (mm)			Weight (kg)	
				H	W	D	Empty	Full
Zip XL™	XL25	25.0 litre	3	710	615	145	20	45
Zip XL™	XL50	50.0 litre	3	885	615	200	28	78
Zip XL™	XL75	75.0 litre	3	970	615	245	36	111

- Electronically-controlled, vented, multipoint heater
- Stores water within 1°C of set temperature
- Temperature adjustment via touch pads
- 'Power-on' and 'Water-ready' LED indicators
- Display panel to show temperature setting
- All connections at bottom or rear of the heater
- All plumbing connections are push-fit
- Control temperature by thermistor

Capacity

25 litres, 50 litres, 75 litres.

Energy rating

3.0 kW.

Heating element

Embedded rod.

Thermostat

Thermistor controlled, range 25°C to 80°C with LED temperature display.

Water tank

Copper sheet with brazed seams.

Case

Corrosion-resistant white, powder coated steel.

Insulation

Fully fire-retardant, foiled, urethane core, slab.

Safety feature

Over-temperature cutout.

Approvals

WRAS Approved and CE Endorsed.

Simple to operate

Integral touch pads make setting the desired temperature easy.

Display panel shows set temperature and operating temperature.

Power on light indicates power supply to heater.

Heating/ready light is steady when heating, flashing when within 1°C of set temperature, out when ready.

Simple to install

Supplies temperature controlled water to single or multiple outlets.

Temperature easily set for hand washing, bathing or dish washing.

Connects directly to the cold water supply.

Vented storage system—no need to fit an expansion valve or relief valve.

Warranty

One-year on site parts and labour. For full details of the Zip Warranty Scheme visit: www.zipheaters.co.uk/warranty.

Installation

Location

Should be mounted on a wall with the base of the heater at least 750mm above the highest draw-off point.

The wall and fastenings must support the weight of the heater when full.

Should be fastened using the integral load bearing slots in the rear of the case.

Top clearance of 150mm above heater should be allowed for service access.

Bottom clearance of 200mm must be allowed for withdrawal of heating element.

Plumbing

All plumbing connections via compression fittings at base or rear of the heater.

Cold inlet 15mm push fit, hot outlet 22mm push fit, overflow 22mm push fit.


Electrical

To be wired to a double pole fused spur, minimum break rating of 13 amps.

Installation must comply with current IEE regulations.

Caution

Variable temperature water heaters should be set only in strict compliance with regulations governing the temperature of stored and dispensed hot water.

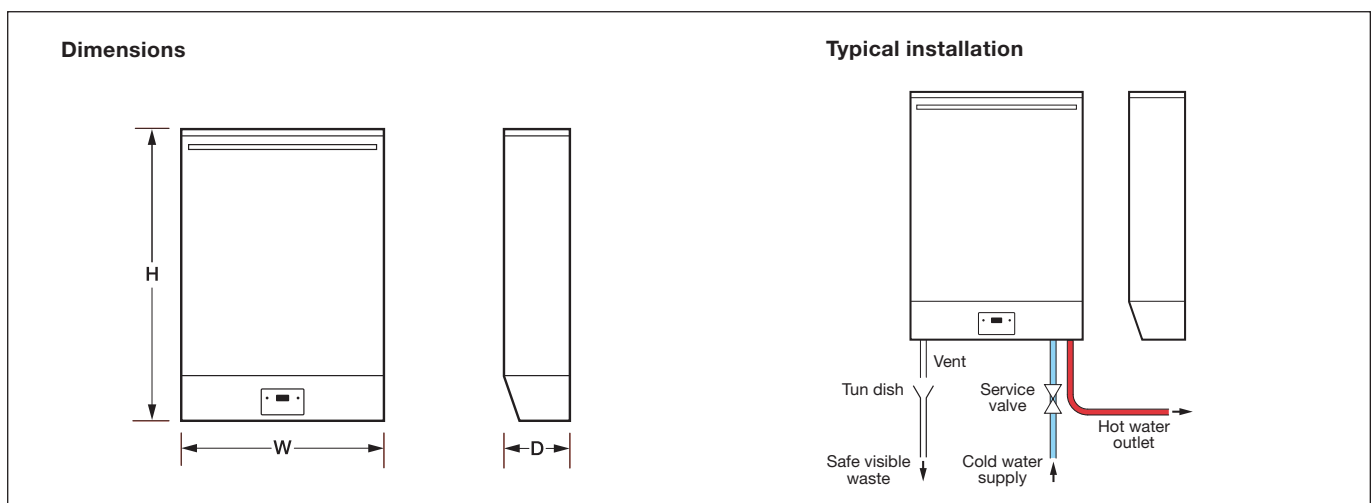

01.01.10