

Zip HydroTap® Miniboil® Classic & Elite

Super-compact economy filtered boiling and filtered cold drinking water for the home

Choice of two tap styles

Classic



Elite



Easy to use touch pad control panel.



Features

- Super-compact, instant boiling water system for the home.
- Press the red touch pad and safety lock together for filtered boiling water, instantly. No more waiting for water to boil for tea, coffee and cooking.
- Press the blue touch pad for filtered cold drinking water, instantly. Great tasting freshly filtered water for cool drinks and cooking.
- Permanent safety lock requires two finger operation to access boiling water.
- Inactivity sleep mode, when activated, powers down the system to an energy-saving 64°C after 2 hours non-use, with boiling resuming at next draw off.
- Temperature status indicator signals when boiling water is ready to use.
- Filter warning signals when the water filter cartridge is due for replacement.

Super compact under sink unit with external filter system

- Makes it easy to install where sink cupboard space is limited.
- PLUS internal boiling water pump for steady continuous flow.
- Water dispenses at set temperature from the first drop. No waste.
- PLUS cool-touch tap head and body.

Superior triple action sub-micron filtration ensures crystal clear, great tasting, healthier water

- 1) Removes impurities smaller than one thousandth of a millimetre, including Cryptosporidium and Giardia. Reduces dirt, rust, asbestos fibres and other suspended impurities.
- 2) Removes chlorine plus other tastes and odours to leave water crystal clear and odourless.
- 3) Reduces common limescale build up inside the tank. In hard water areas the Zip FL3000 scale prevention system should also be used.



Zip HydroTap® Miniboil® Classic & Elite

Product Selection Chart

Zip Model	Product Code	Boiling Water	Chilled Water	Hot Water	Cold Water	Boiling Chamber	Total Rating	Under-Sink W x D x H
Miniboil Classic	MB1BA	✓	-	-	✓	1.8 litres	2.0 kW	212 x 272 x 338
Miniboil Elite	MB2BA	✓	-	-	✓	1.8 litres	2.0 kW	212 x 272 x 338

Technical Features

Power-Pulse™

Energy saving technology reduces power consumption by allowing the system to electronically regulate its power during high and low usage periods. This saves energy whilst maintaining the tightest possible temperature control.

Inactivity sleep mode

The boiling system can be pre-set to power down after two hours of non-use, but will still retain stored 'boiling' water at an energy-saving 64°C. Quickly recovers to pre-set boiling temperature when re-used.

Installation Requirements

Zip Miniboil is an open outlet, boiling system designed to operate at 98°C.

Location

The Zip Miniboil tap may be installed at a sink, or away from the sink on a Zip Miniboil 'font' accessory which can be drained to waste.

Requires a 35mm hole for tap installation.

Plumbing

Should be installed by a competent person in accordance with the fitting instructions supplied and UK Water Regulations.

Water supply must be potable (drinkable), with a minimum pressure of 0.7 bar.

The pressure limiting valve supplied with the unit should be fitted as shown on the installation diagram.

The under sink system must be located within one metre of the tap. Under sink connection tubing to the tap must be taut for proper drainage and never be looped or coiled.

An isolating valve (not supplied) should be installed between the water supply and the under sink system.

Electrical

Should be installed by a competent person, in accordance with the fitting instructions supplied and UK Electrical Regulations. The system should be connected to a convenient 13A plug or fused spur. Power supply 220V to 240V AC 50/60 Hz.

Clearances

The under-sink system must be installed with clearances of 50mm left and right, 200mm above and 65mm rear.

Filtration

Supplied with external triple action sub-micron filter to ensure crystal clear, great tasting, healthier water.

In hard water areas the Zip FL3000 filter system should also be used to prevent limescale formation in the boiling water tank.

Accessories

- ZT004 Tap Font Kit Classic including Tap Extension
- ZT008 Tap Font Kit Elite including Tap Extension
- SP90026 100mm Tap Extension
- ZT002 Sub-micron replacement filter
- FL3000 Limescale filter system
- FL3001 Limescale filter replacement cartridge

Warranty

12 months on site parts and labour warranty. For full warranty details please visit www.zipheaters.co.uk.

Miniboil is specifically designed for use in domestic environments. Use of the product in commercial applications may invalidate the warranty.


Technical Support

Contact Zip Heaters (UK) Ltd
14 Bertie Ward Way,
Dereham, Norfolk,
NR19 1TE
Tel 0800 077 8302
Website www.zipheaters.co.uk

Service

Zip HydroCare Tel: 01362 852244

HydroTap Miniboil Classic & Elite

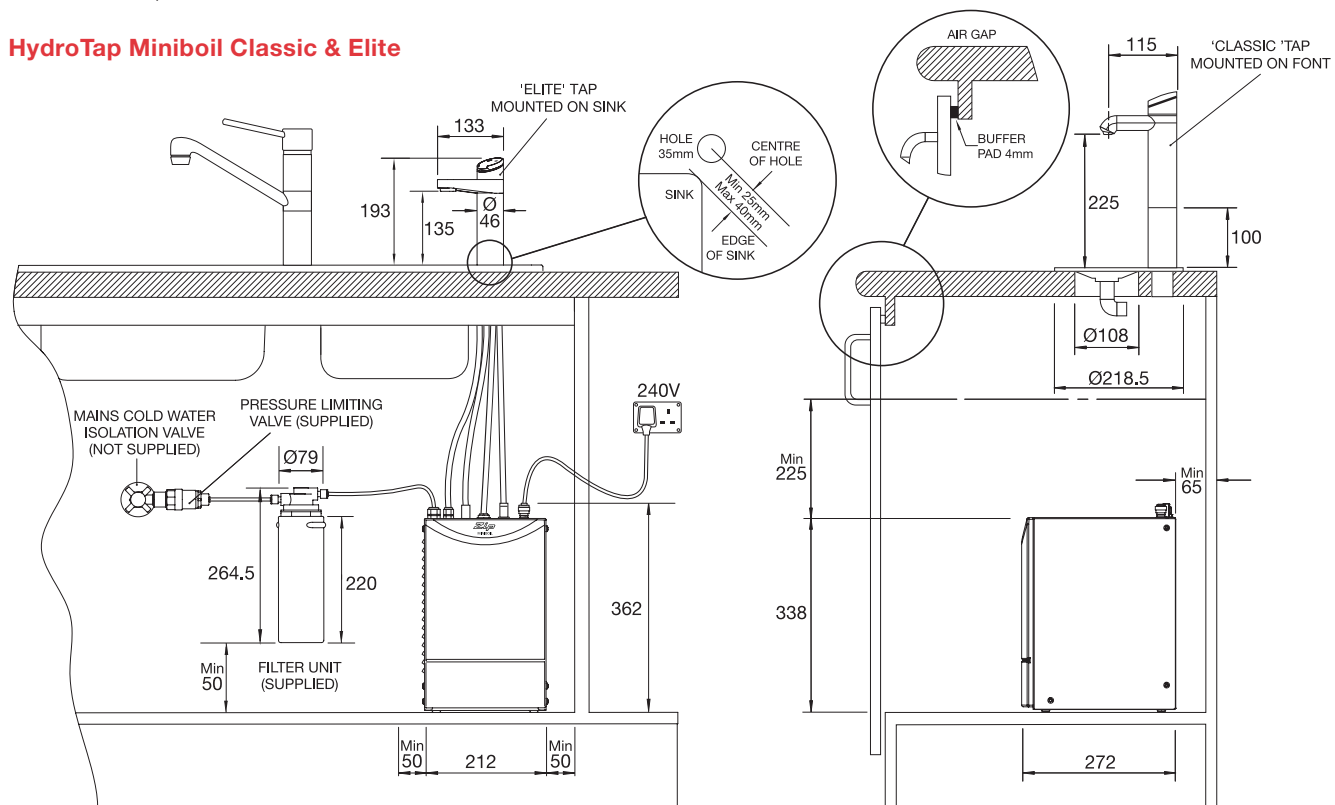

As Zip policy is one of continuous product improvement changes to specifications may be made without prior notice.

The terms, Zip, HydroTap, Miniboil and Power-Pulse are Trademarks