



# Zip Scale Management

Drinking water filtration



## Features

### Anti scale filter

Eliminates scale up to a throughput of 3000 litres

Easy to install

Easy to change filter cartridge

### Tank exchange programme

Replaces scale affected HydroTap tanks and parts with completely refurbished tanks

01.01.10



Limescale filtration	Product code	Operating pressure	Operating temperature	Maximum capacity (litres)	Dimensions(mm) W x D x H
Filter housing /head /filter	FL3000	2-6 bar	4-30°C	3000	126 x 106 x 490
Replacement cartridge	FL3001	2-6 bar	4-30°C	3000	

#### 4 stage filtration

- Pre-filter to remove larger particles
- Ion exchange filter medium
- Activated carbon
- Fine filter

#### Ion exchange

Calcium and magnesium ions are selectively removed to prevent lime-scale deposits.

#### Location

Can be installed vertically or horizontally.

#### Use with HydroTap

Can be used in addition to or as a replacement to the integral submicron filter.

#### Filtration

10 micron.

#### Approval

WRAS.

#### Note

FL3000 must only be used when the appliance is free from limescale.

#### Installation kit

1/2" BSP male straight adaptor and push fit stem reducer for connection to mains supply or HydroTap.

1/2" BSP female to push fit adaptor for connection to mains supply or HydroTap.

2 x 3/8" BSP female to push fit adaptor for connection to mains supply or HydroTap.


4 x push fit stem elbows for ease of installation (optional use).

2 metres 3/8" flexible nylon tubing.

Circular retaining clip to support free end of filter assembly in horizontal installation.

4 x fixing screws.

Internal filter blanking plug (optional use).

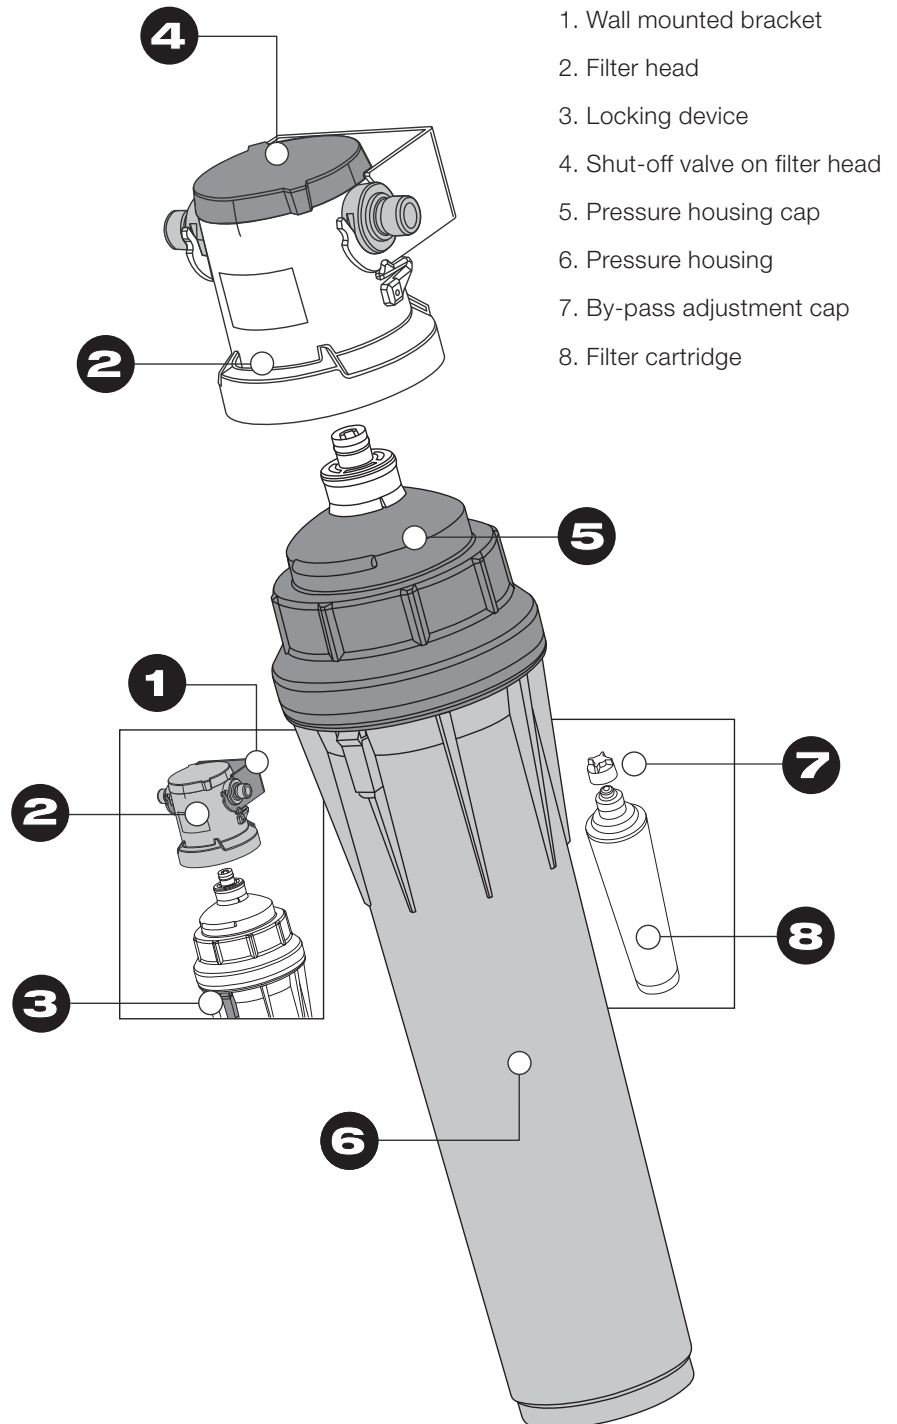

#### Tank replacement programme

For customers who have Zip HydroTaps that have accumulated scale build up, a specialised tank exchange system is available.

Zip engineers will remove the tank assembly and replace it with a completely refurbished tank that has been through the Zip de-scaling programme.

01.01.10